

■ PRODUCT CHARACTERISTICS

VDSS	-20V
$R_{DS(on)Typ}@V_{GS}=-4.5V$	33m Ω
$R_{DS(on)Typ}@V_{GS}=-2.5V$	44m Ω
ID	-6A

■ APPLICATIONS

- Load switch for portable
- DC/DC converter

■ FEATURES


- * High Density Cell Design For Ultra Low On-Resistance
- * Advanced trench process technology

■ ORDER INFORMATION

Order codes		Package	Packing
Halogen-Free	Halogen		
N/A	PMV32UP	SOT-23	3000pieces/Reel

■ ABSOLUTE MAXIMUM RATINGS($T_A=25^{\circ}C$, unless otherwise specified)

PARAMETER	SYMBOL	RATING	UNITS
Drain-Source Voltage	V_{DS}	-20	V
Gate-Source Voltage	V_{GS}	± 12	V
Continuous Drain Current	I_D	-6	A
Pulsed Drain Current	I_{DM}	-24	A
Power Dissipation	P_D	1.83	W
Junction to Ambient	θ_{JA}	82	$^{\circ}C/W$
Junction Temperature	T_J	+150	$^{\circ}C$
Storage Temperature	T_{STG}	-55 ~ +150	$^{\circ}C$

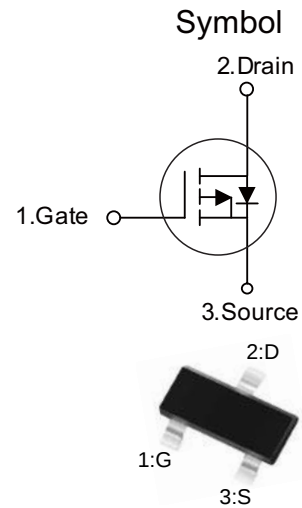

■ ELECTRICAL CHARACTERISTICS ($T_J = 25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Of characteristics						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V, I _D =-250μA	-20	-	-	V
Drain-Source Leakage Current	I _{DSS}	V _{DS} =-20V, V _{GS} =0V	-	-	-1	μA
Gate-Source Leakage Current	I _{GSS}	V _{GS} =±12V, V _{DS} =0V	-	-	±100	nA
On characteristics						
Gate Threshold Voltage	V _{GS(TH)}	V _{DS} =V _{GS} , I _D =-250uA	-0.45	-	-1.2	V
Drain-Source On-State Resistance	R _{DS(ON)}	V _{GS} =-4.5V, I _D =-4.2A	-	33	45	mΩ
		V _{GS} =-2.5V, I _D =-3.4A	-	44	55	mΩ
Dynamic characteristics						
Input Capacitance	C _{iss}	V _{GS} =0V, V _{DS} =-20V, f=1MHz	-	932	-	pF
Output Capacitance	C _{oss}		-	100	-	pF
Reverse Transfer Capacitance	C _{rss}		-	87	-	pF
Switching characteristics						
Total Gate Charge	Q _G	V _{DS} =-4V, V _{GS} =-4.5V, I _D =-3.5A	-	12.5	-	nC
Gate-Source Charge	Q _{GS}		-	2.5	-	nC
Gate-Drain Charge	Q _{GD}		-	1.8	-	nC
Turn-ON Delay Time	t _{D(ON)}	V _{DS} =-4V, V _{GS} =-4.5V, I _D =-1A, R _G =6Ω, R _D =4Ω	-	10	-	ns
Turn-ON Rise Time	t _R		-	39	-	ns
Turn-OFF Delay Time	t _{D(OFF)}		-	42	-	ns
Turn-OFF Fall Time	t _F		-	28	-	ns
Source-drain diode ratings and characteristics						
Maximum Continuous Forward Current	I _S		-	-	-6	A
Maximum Pulsed Forward Current	I _{SM}		-	-	-24	A
Drain-Source Diode Forward Voltage	V _{SD}	V _{GS} =0V, I _S =-1.2A	-	-	-1.2	V

■ TYPICAL CHARACTERISTICS

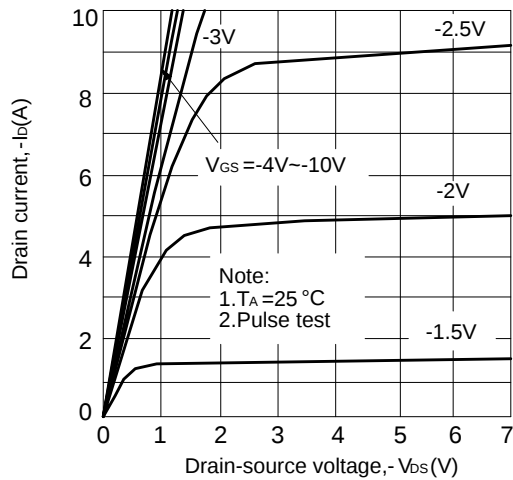


Figure 1: Drain current vs. drain-source voltage

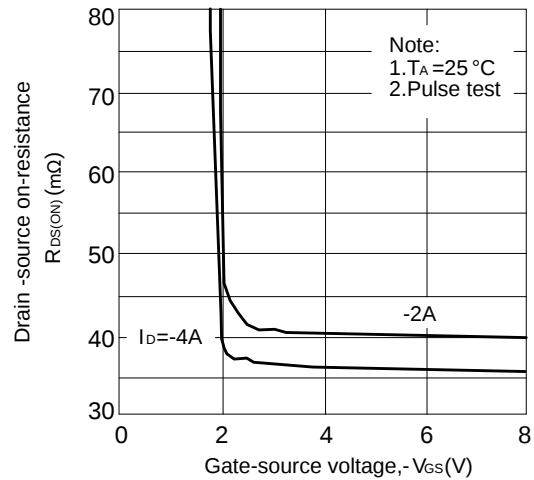


Figure 2: Drain-source on-resistance vs. gate-source voltage

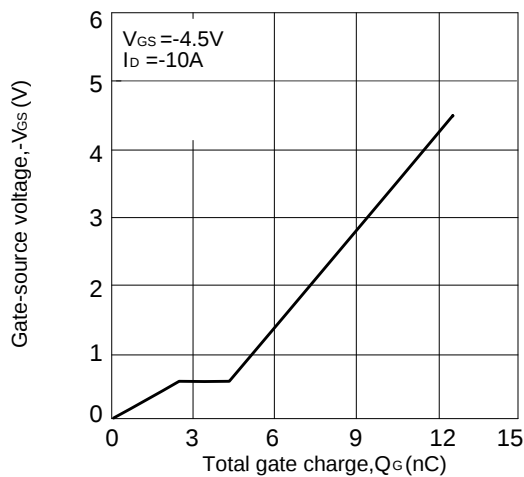


Figure 3: Gate charge characteristics

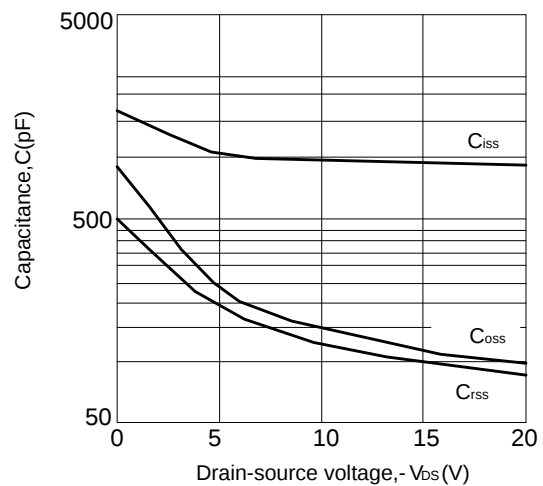


Figure 4: Capacitance characteristics

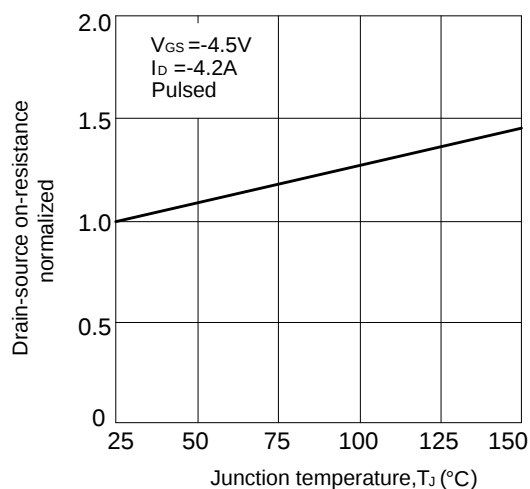


Figure 5: Drain-source on-resistance vs. junction temperature

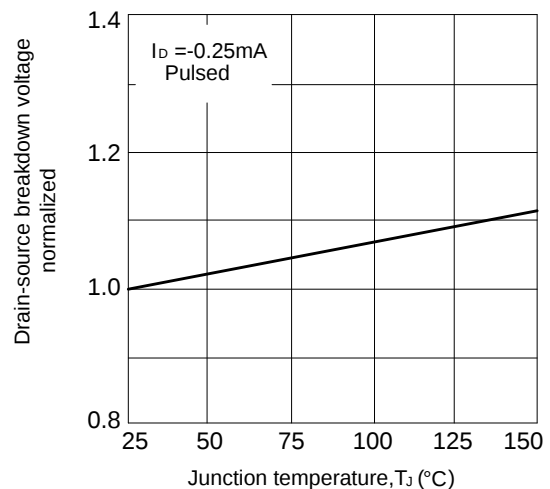


Figure 6: Breakdown voltage vs. junction temperature

■ TYPICAL CHARACTERISTICS(Cont.)

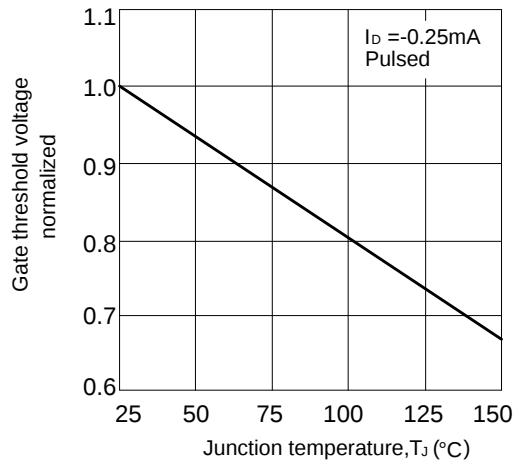


Figure 7: Gate threshold voltage vs. junction temperature

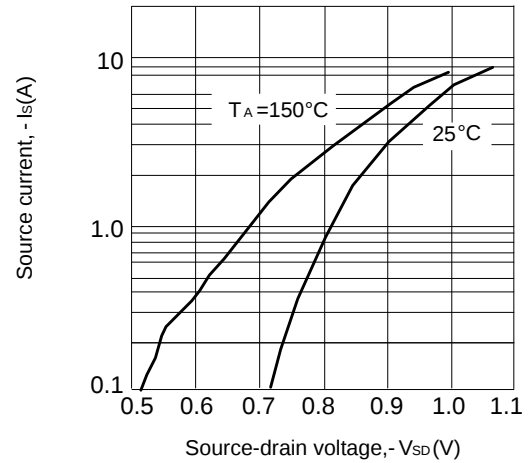


Figure 8: Source current vs. source-drain Voltage

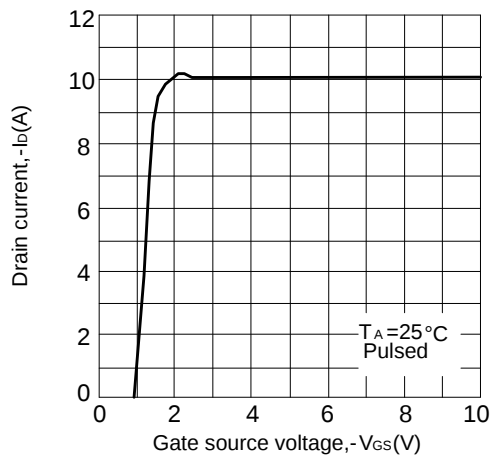


Figure 9: Drain current vs. gate-source voltage

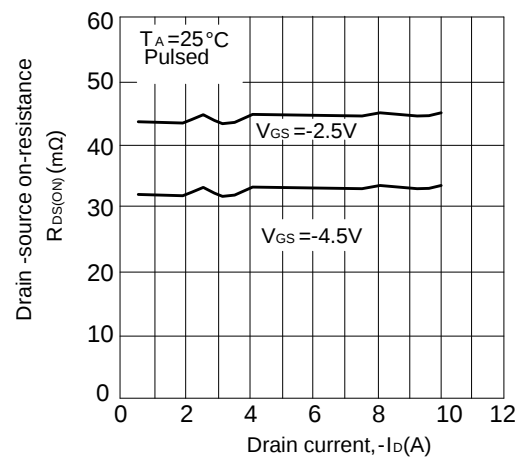


Figure 10: Drain-source on-resistance vs. drain current

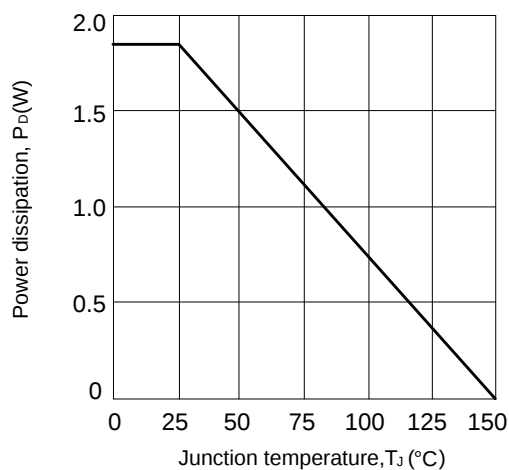


Figure 11: Power dissipation vs. junction temperature


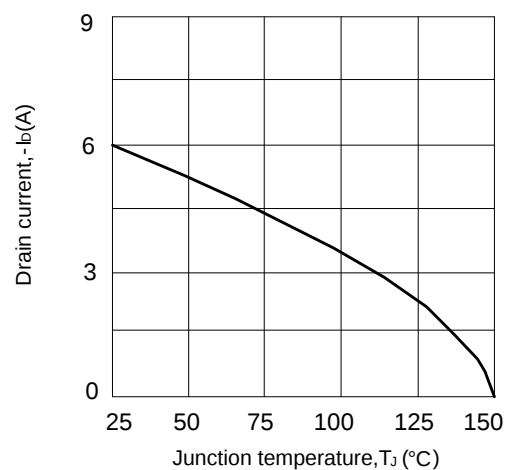


Figure 12: Drain current vs. junction temperature


■ SOT-23 PACKAGE OUTLINE DIMENSIONS

单位 (UNIT) : mm

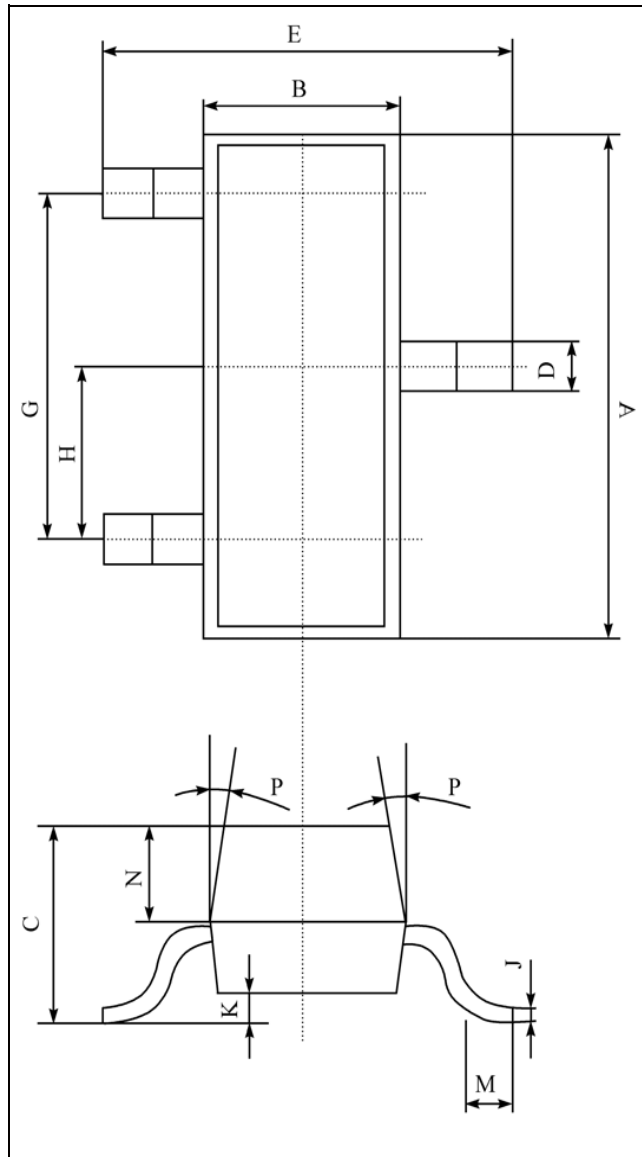


序号	数值及公差
A	2.90 ± 0.10
B	1.30 ± 0.10
C	1.00 ± 0.10
D	0.40 ± 0.10
E	2.40 ± 0.20
G	1.90 ± 0.10
H	0.95 ± 0.05
J	0.13 ± 0.05
K	$0.00-0.10$
M	≥ 0.20
N	0.60 ± 0.10
P	$7 \pm 2^\circ$
Packing SOT-23 包装规格 SMD片式表面贴封装 包装方式: 载带卷盘包装 Tape & Reel, 3Kpcs/Reel 每卷数量3000只 (3Kpcs/Reel) 每盒数量45000只 (45Kpcs/BOX) 每箱数量180000只 (180Kpcs/Cartons)	

SOT-23 Embossed Carrier Tape

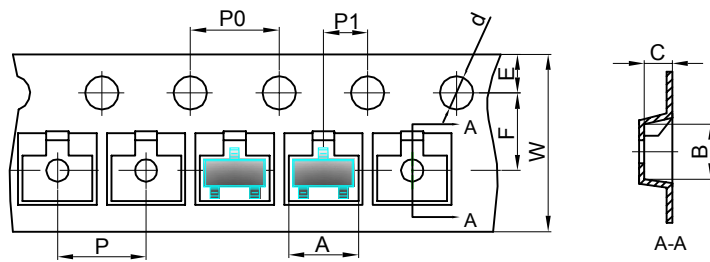


Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
SOT-23	3.15	2.77	1.22	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

SOT-23 Tape Leader and Trailer

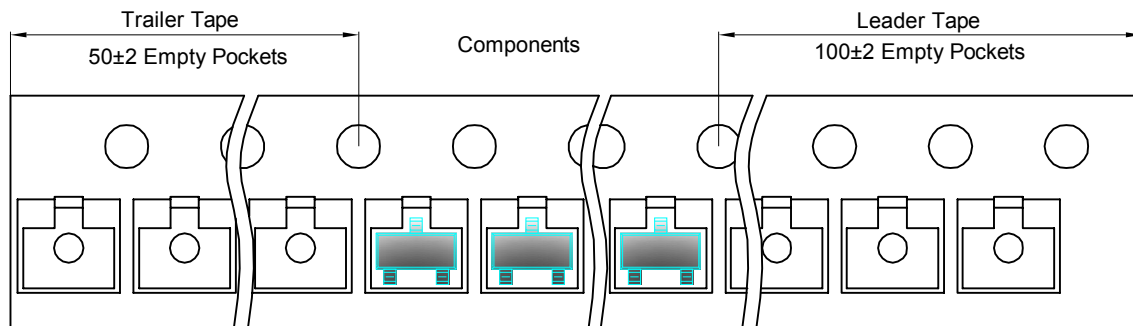

SOT-23 Reel

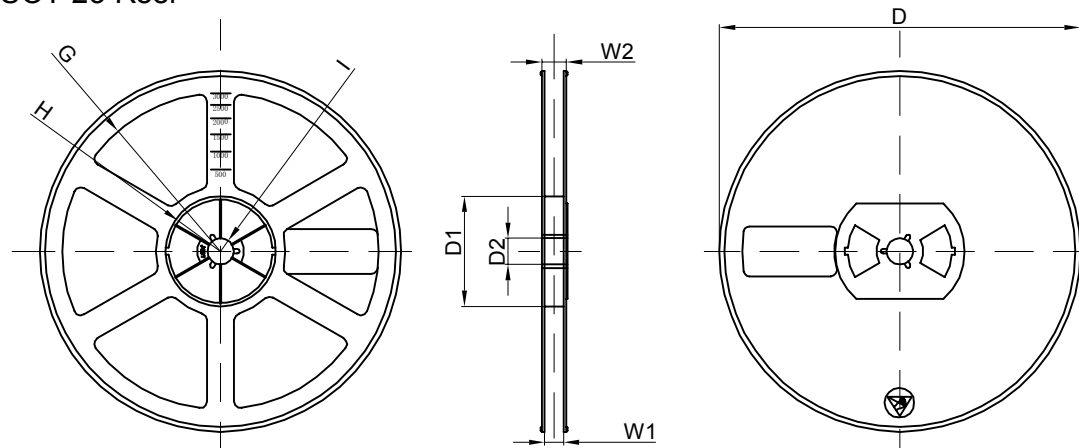

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7" Dia	Ø178.00	54.40	13.00	R78.00	R25.60	R6.50	9.50	12.30

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	45,000 pcs	192×192×193	180,000 pcs	404×404×214	