


Features

- -20V/-6.2A,
 $R_{DS(ON)} = 30m\Omega(\text{typ.}) @ V_{GS} = -4.5V$
 $R_{DS(ON)} = 36m\Omega(\text{typ.}) @ V_{GS} = -2.5V$
 $R_{DS(ON)} = 50m\Omega(\text{typ.}) @ V_{GS} = -1.8V$
- 100% UIS+ R_g Tested
- Reliable and Rugged
- Lead Free and Green Devices Available
(RoHS Compliant)


Applications

- Power Management in Notebook Computer, Portable Equipment and Battery Powered Systems.

Pin Description



Top View of SOT-23



P-Channel MOSFET

Absolute Maximum Ratings (T_A = 25°C Unless Otherwise Noted)

Symbol	Parameter		Rating	Unit
V _{DSS}	Drain-Source Voltage		-20	V
V _{GSS}	Gate-Source Voltage		±12	
I _D ^a	Continuous Drain Current (V _{GS} =-4.5V)	T _A =25°C	-6.2	A
		T _A =70°C	-3.72	
I _{DM} ^a	Pulsed Drain Current (V _{GS} =-4.5V)		-18	
I _S ^a	Diode Continuous Forward Current		-6.2	
T _J	Maximum Junction Temperature		150	°C
I _{AS} ^b	Avalanche Current, Single pulse	L=0.1mH	-18	A
E _{AS} ^b	Avalanche Energy, Single pulse	L=0.1mH	16	mJ
T _{STG}	Storage Temperature Range		-55 to 150	°C
P _D ^a	Maximum Power Dissipation	T _A =25°C	1.6	W
		T _A =70°C	1	
R _{θJA} ^a	Thermal Resistance-Junction to Ambient	t ≤ 10s	80	°C/W
		Steady State	100	

Note a : Surface Mounted on 1in² pad area, t ≤ 10sec.

Note b : UIS tested and pulse width limited by maximum junction temperature 150°C (initial temperature T_J=25°C).

Electrical Characteristics (T_A = 25°C Unless Otherwise Noted)


Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Static Characteristics						
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _{DS} =-250μA	-20	-	-	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =-16V, V _{GS} =0V	-	-	-1	μA
		T _J =85°C	-	-	-30	
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _{DS} =-250μA	-0.5	-0.7	-1	V
I _{GSS}	Gate Leakage Current	V _{GS} =±12V, V _{DS} =0V	-	-	±100	nA
R _{DS(ON)} ^c	Drain-Source On-state Resistance	V _{GS} =-4.5V, I _{DS} =-5.5A	-	30	36	mΩ
		V _{GS} =-2.5V, I _{DS} =-3.5A	-	36	45	
		V _{GS} =-1.8V, I _{DS} =-1A	-	50	70	
Diode Characteristics						
V _{SD} ^c	Diode Forward Voltage	I _{SD} =-1A, V _{GS} =0V	-	-0.7	-1	V
t _{rr} ^d	Reverse Recovery Time	I _{SD} =-5.5A,	-	26	-	ns
Q _{rr} ^d	Reverse Recovery Charge	dI _{SD} /dt=100A/μs	-	9	-	nC
Dynamic Characteristics ^d						
R _g	Gate Resistance	V _{GS} =0V, V _{DS} =0V,F=1MHz	-	3.2	-	Ω
C _{iss}	Input Capacitance	V _{GS} =0V, V _{DS} =-10V, Frequency=1.0MHz	-	832	-	pF
C _{oss}	Output Capacitance		-	184	-	
C _{rss}	Reverse Transfer Capacitance		-	148	-	
t _{d(ON)}	Turn-on Delay Time	V _{DD} =-10V, R _L =10Ω, I _{DS} =-1A, V _{GEN} =-10V, R _G =6Ω	-	8	-	ns
t _r	Turn-on Rise Time		-	14	-	
t _{d(OFF)}	Turn-off Delay Time		-	38	-	
t _f	Turn-off Fall Time		-	36	-	
Gate Charge Characteristics ^d						
Q _g	Total Gate Charge	V _{DS} =-10V, V _{GS} =-4.5V, I _{DS} =-5.5A	-	11	-	nC
Q _{gs}	Gate-Source Charge		-	0.8	-	
Q _{gd}	Gate-Drain Charge		-	4.5	-	

Note c : Pulse test; pulse width≤300μs, duty cycle≤2%.


Note d : Guaranteed by design, not subject to production testing.

Typical Operating Characteristics


Power Dissipation

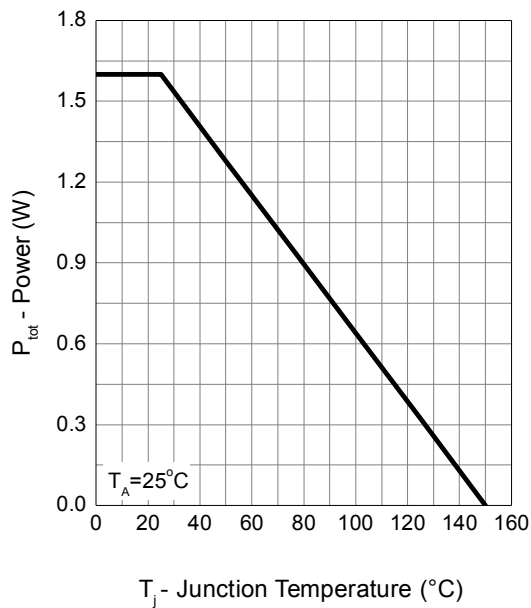


Drain Current

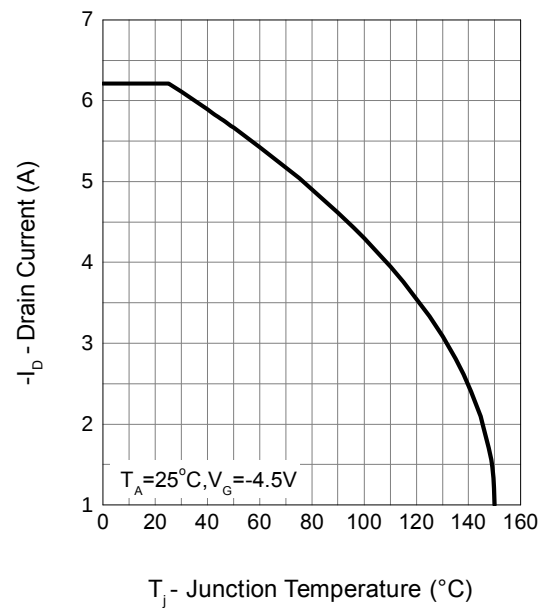





Safe Operation Area

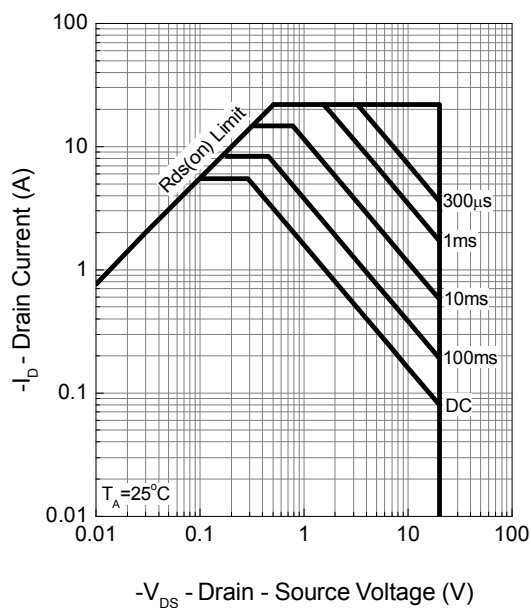

Thermal Transient Impedance

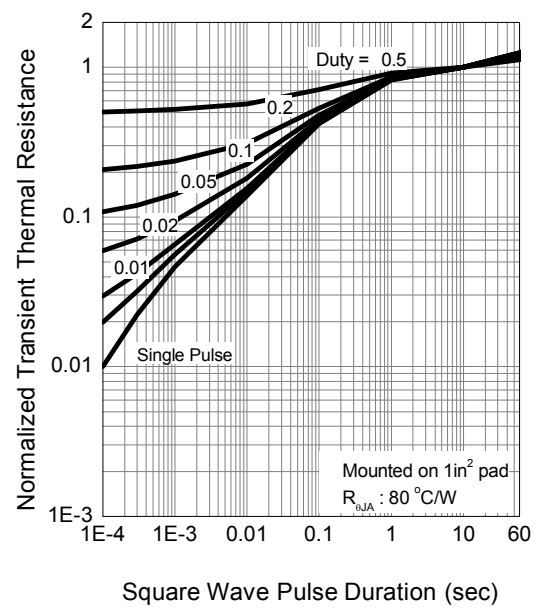


Typical Operating Characteristics (Cont.)

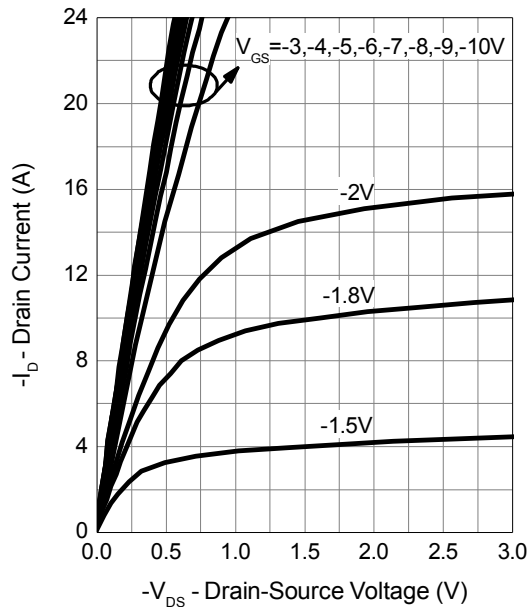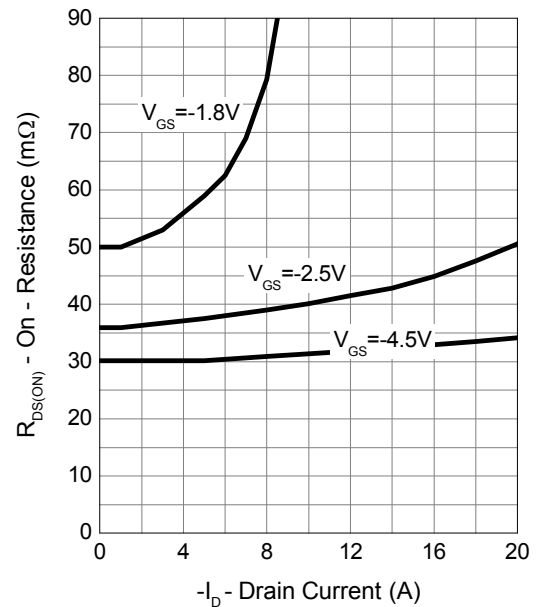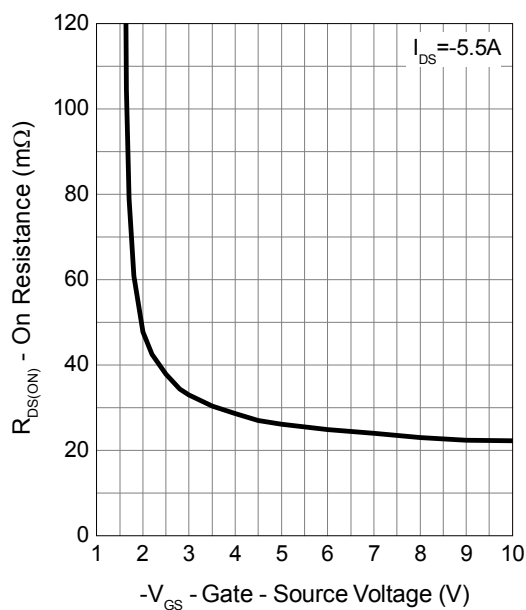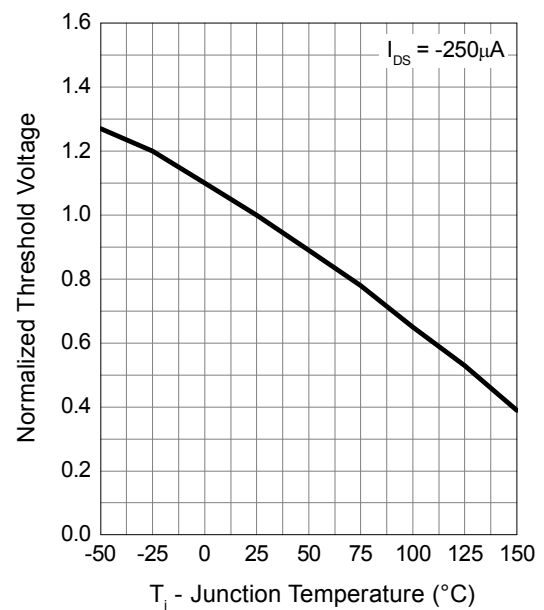
Output Characteristics

Drain-Source On Resistance

Gate-Source On Resistance

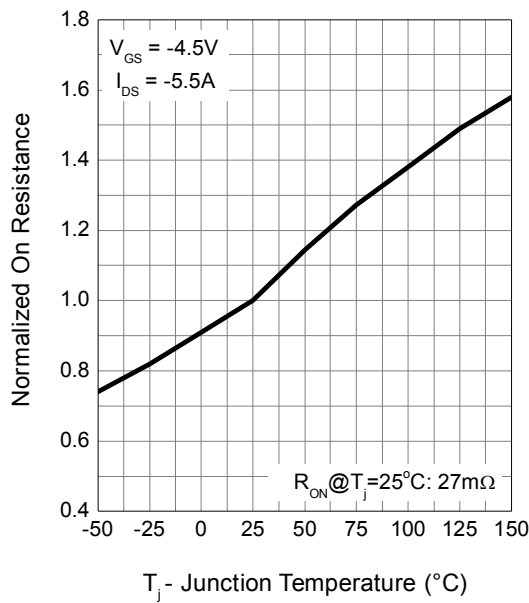Gate Threshold Voltage


Typical Operating Characteristics (Cont.)

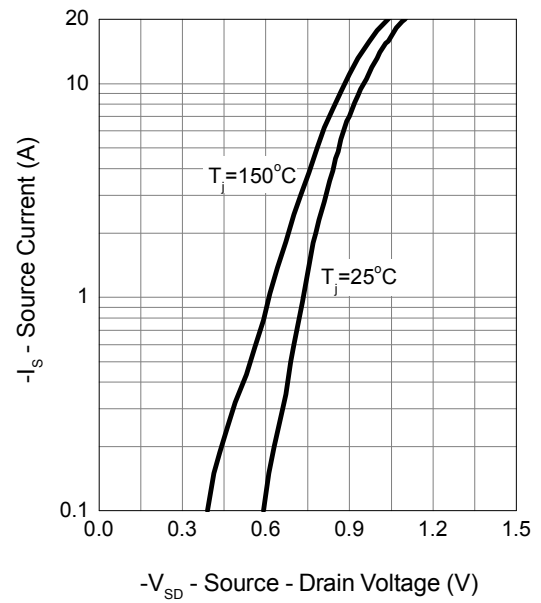
Drain-Source On Resistance




Source-Drain Diode Forward





Capacitance

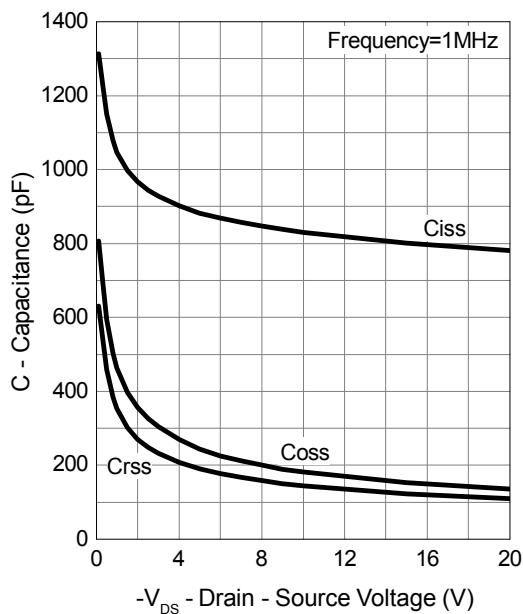



Gate Charge

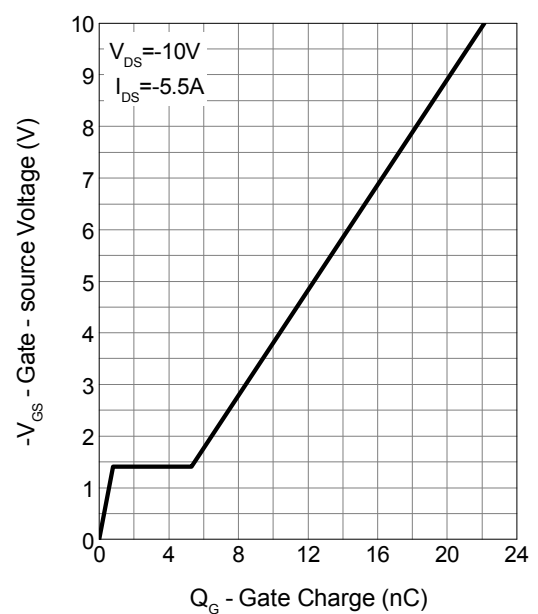

Avalanche Test Circuit and Waveforms

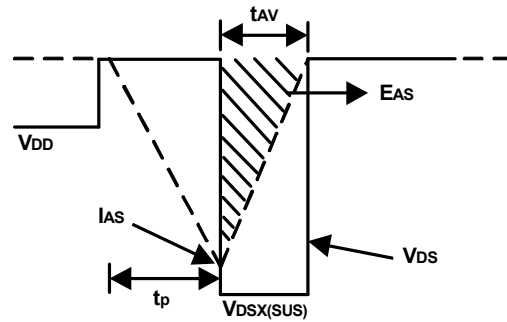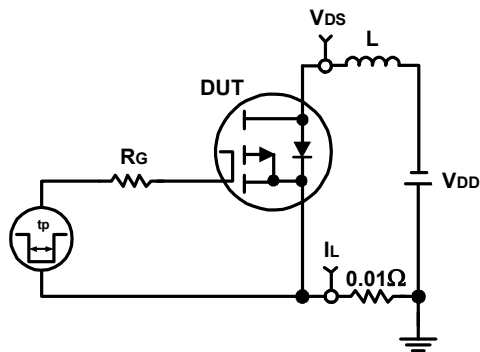


Switching Time Test Circuit and Waveforms

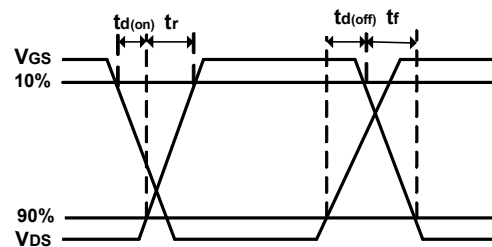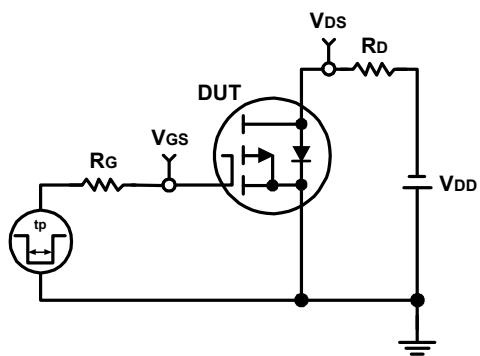


Package Information

SOT-23

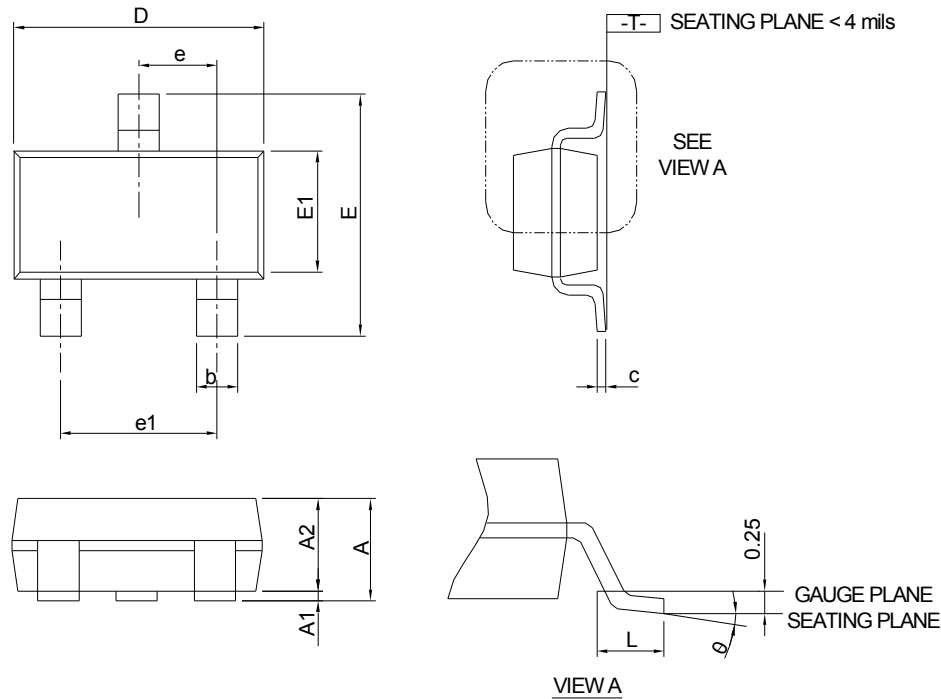

SYMBOL	SOT-23			
	MILLIMETERS		INCHES	
	MIN.	MAX.	MIN.	MAX.
A	-	1.20	-	0.047
A1	0.00	0.08	0.000	0.003
A2	0.90	1.12	0.035	0.044
b	0.30	0.50	0.012	0.020
c	0.08	0.22	0.003	0.009
D	2.70	3.10	0.106	0.122
E	2.25	2.55	0.102	0.118
E1	1.20	1.40	0.055	0.071
e	0.95 BSC		0.037 BSC	
e1	1.90 BSC		0.075 BSC	
L	0.30	0.60	0.012	0.024
θ	0°	8°	0°	8°

RECOMMENDED LAND PATTERN

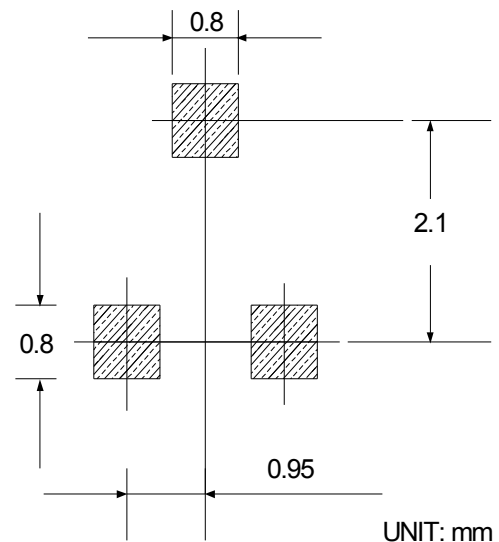

Note : Dimension D and E1 do not include mold flash, protrusions or gate burrs. Mold flash, protrusion or gate burrs shall not exceed 10 mil per side.