

Features

- $I_{F(AV)}$ 2A
- V_{RRM} 20V-200V
- High surge current capability
- Polarity: Color band denotes cathode


Applications

- Rectifier

Marking

- SS2X

X : From 2 To 20

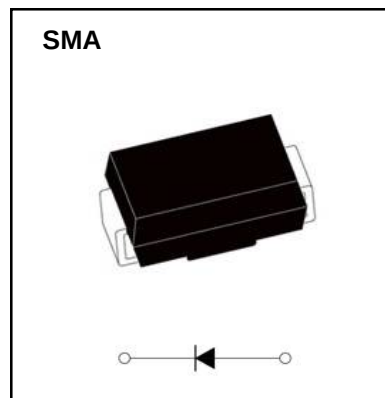

Limiting Values(Absolute Maximum Rating)

Item	Symbol	Unit	Test Conditions	SS2								
				2	3	4	5	6	8	10	15	20
Repetitive Peak Reverse Voltage	V _{RRM}	V		20	30	40	50	60	80	100	150	200
Maximum RMS Voltage	V _{RMS}	V		14	21	28	35	42	56	70	105	140
Average Forward Current	I _{F(AV)}	A	60Hz Half-sine wave, Resistance load	2.0								
Surge(Non-repetitive)Forward Current	I _{FSM}	A	60Hz Half-sine wave, 1 cycle, Ta=25℃	50								
Junction Temperature	T _J	℃		-55~+125			-55~+150					
Storage Temperature	T _{STG}	℃		-55 ~ +150								

Electrical Characteristics ($T = 25^{\circ}\text{C}$ Unless otherwise specified)

Item	Symbol	Unit	Test Condition		SS2							
					2	3	4	5	6	8	10	15
Peak Forward Voltage	V _F	V	I _F =2.0A		0.55		0.70		0.85		0.95	
Peak Reverse Current	I _{RRM1}	mA	V _{RM} =V _{RRM}	T _a =25°C	0.5			0.1				
	T _a =100°C			10			5.0					
Thermal Resistance	R _{θJ-A}	°C/ W	Between junction and ambient		88							
	R _{θJ-L}		Between junction and terminal		28							
Juction Capacitance (Typical)	C _j	pF	Measured at 1MHZ and Applied Reverse Voltage of 4.0 V.D.C		114		92		53		40	

FIG.1: FORWARD CURRENT DERATING CURVE



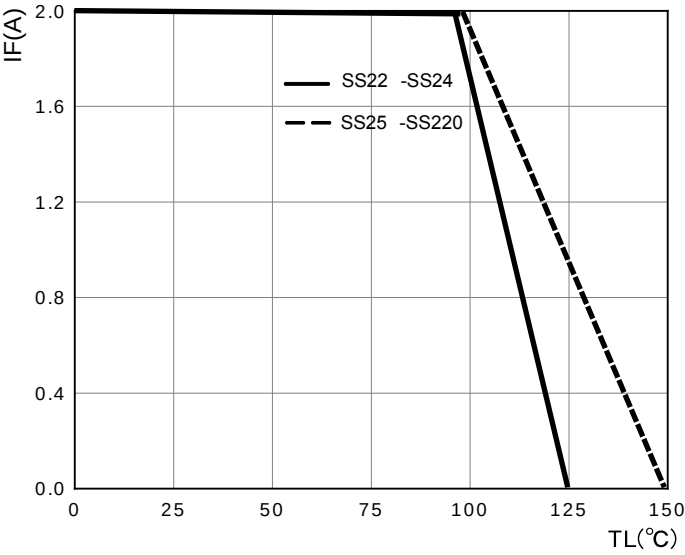


FIG 2: MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

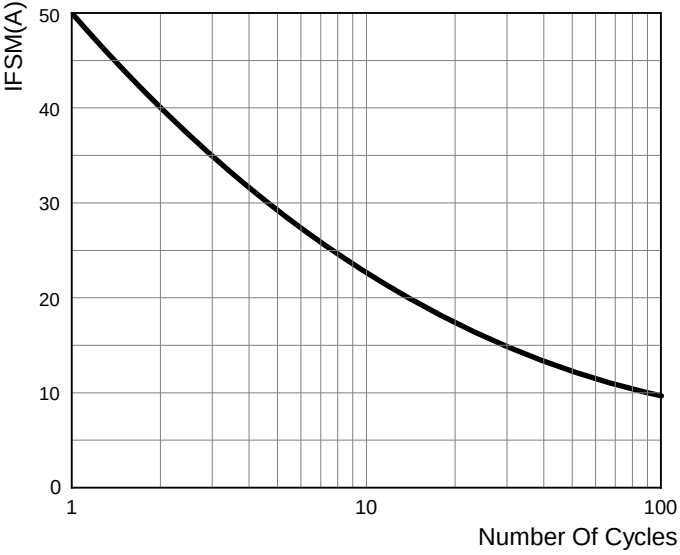


SS22-SS24

FIG.3: TYPICAL FORWARD CHARACTERISTICS

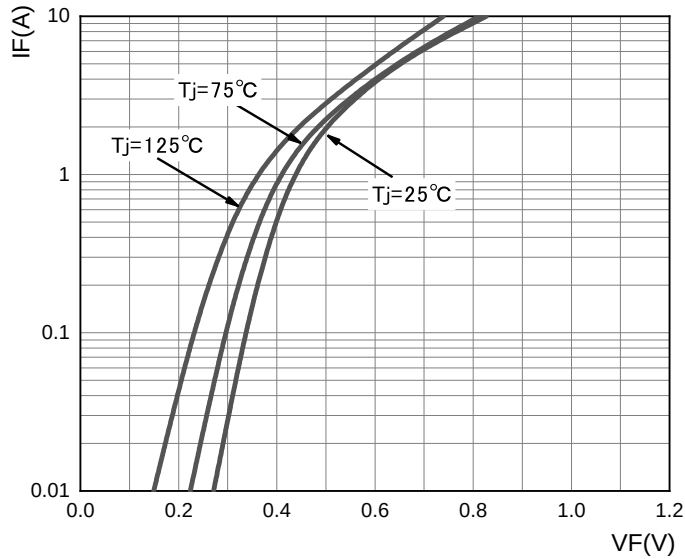

SS22-SS24

FIG.4: TYPICAL REVERSE CHARACTERISTICS

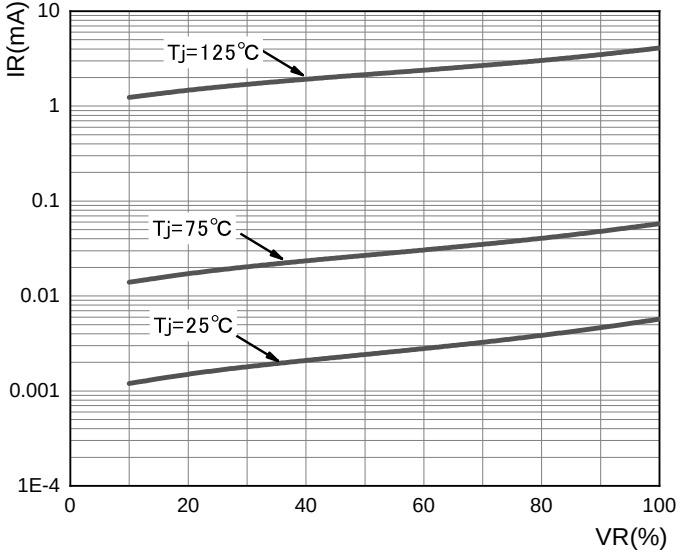

SMA Package Outline Dimensions

